

POWERPLUS

WATER



POWERPLUS

POWERPLUS[®]
HIGH QUALITY TOOLS
GARDENPRO



POWERPLUS

2 YEAR
WARRANTY

SUBMERSIBLE PUMPS

POWEW67900	SUBMERSIBLE PUMP	200W	4
POWEW67902	SUBMERSIBLE PUMP	250W	5
POWEW67904	SUBMERSIBLE PUMP	400W	5
POWEW67906	SUBMERSIBLE PUMP	750W	6
POWEW67920	SUBMERSIBLE PUMP	750W	6
POWEW67912	SUBMERSIBLE PUMP	400W	7
POWEW67915	SUBMERSIBLE PUMP	900W	7

GARDENPRO POWERPLUS® HIGH QUALITY TOOLS

3 YEAR*
WARRANTY

SUBMERSIBLE PUMPS

POWXG9502	SUBMERSIBLE PUMP	350W	8
POWXG9504	SUBMERSIBLE PUMP	250W	9
POWXG9507	SUBMERSIBLE PUMP	550W	9
POWXG9513	SUBMERSIBLE PUMP	550W	10
POWXG9524	SUBMERSIBLE PUMP	750W	10
POWXG9535	SUBMERSIBLE PUMP	900W	11
POWXG9537	SUBMERSIBLE PUMP	1100W	11

PRESSURE PUMPS

POWXG9554	PRESSURE PUMP GARDEN	1000W	12
POWXG9561	PRESSURE PUMP HOME & GARDEN	600W	13
POWXG9565	PRESSURE PUMP HOME & GARDEN	1200W	13
POWXG9571	PRESSURE PUMP HOME	600W	14
POWXG9573	PRESSURE PUMP HOME	1000W	15
POWXG9576	PRESSURE PUMP HOME	1200W	15

HIGH PRESSURE CLEANERS

POWXG90400	HIGH PRESSURE CLEANER	1500W	16
POWXG90405	HIGH PRESSURE CLEANER	1900W	16
POWXG90410	HIGH PRESSURE CLEANER	1900W	17
POWXG90415	HIGH PRESSURE CLEANER	2200W	17
POWXG90420	HIGH PRESSURE CLEANER	180cc	18
POWXG90425	HIGH PRESSURE CLEANER	180cc	18
POWXG9009	HIGH PRESSURE CLEANER	180cc	18

HIGH PRESSURE CLEANER ACCESSORIES

POWXG90950	PIPE CLEANING SET	10m	23
POWXG90091	PIPE CLEANING SET	15m	23

WATER PUMP ACCESSORIES

POWACW01	OUTLET SUBMERSIBLE PUMPS	23
POWACW02	OUTLET GARDEN PUMPS	23
POWACW03	ASPIRATION HOSE	23
POWACW04	FILTER	23

* except accessories

POWERPLUS



POWEW67900



Voltage / frequency		230V~ 50Hz
Power		200W
Flow rate		3500 l/h
Max. pressure height		5m
Max. submersible depth		5m
Min. residual water height		5mm
Max. grain size		3mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing

SUBMERSIBLE PUMPS

DOMPELPOMPEN | POMPES SUBMERSIBLES | TAUCHPUMPEN | BOMBAS SUMERGIBLES



POWEW67902



Voltage / frequency		230V~ 50Hz
Power		250W
Flow rate		5000 l/h
Max. pressure height		6m
Max. submersible depth		5m
Min. residual water height		5mm
Max. grain size		5mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWEW67904



Voltage / frequency		230V~ 50Hz
Power		400W
Flow rate		7500 l/h
Max. pressure height		5m
Max. submersible depth		5m
Min. residual water height		30mm
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWEW67906



Voltage / frequency		230V~ 50Hz
Power		750W
Flow rate		13000 l/h
Max. pressure height		8m
Max. submersible depth		7m
Min. residual water height		30mm
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWEW67920



Voltage / frequency		230V~ 50Hz
Power		750W
Flow rate		12500 l/h
Max. pressure height		8.5m
Max. submersible depth		7m
Min. residual water height		15mm
Max. grain size		5mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Built-in switch
- | Polypropylene pump housing

SUBMERSIBLE PUMPS

DOMPELPOMPEN | POMPES SUBMERSIBLES | TAUCHPUMPEN | BOMBAS SUMERGIBLES



POWEW67912



Voltage / frequency		230V~ 50Hz
Power		400W
Flow rate		7500 l/h
Max. pressure height		5m
Max. submersible depth		5m
Min. residual water height		35mm
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Stainless steel pump housing



POWEW67915



Voltage / frequency		230V~ 50Hz
Power		900W
Flow rate		13000 l/h
Max. pressure height		9m
Max. submersible depth		7m
Min. residual water height		37mm
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Stainless steel pump housing



POWXG9502



Voltage / frequency		230V~ 50Hz
Power		350W
Flow rate		5000 l/h
Max. pressure height		6.5m
Max. submersible depth		7m
Min. residual water height		5mm
Max. grain size		5mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing

SUBMERSIBLE PUMPS

DOMPELPOMPEN | POMPES SUBMERSIBLES | TAUCHPUMPEN | BOMBAS SUMERGIBLES



POWXG9504



Voltage / frequency		230V~ 50Hz
Power		250W
Flow rate		5500 l/h
Max. pressure height		6m
Max. submersible depth		7m
Min. residual water height		5mm
Max. grain size		5mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWXG9507



Voltage / frequency		230V~ 50Hz
Power		550W
Flow rate		11.500 l/h
Max. pressure height		8.5m
Max. submersible depth		7m
Min. residual water height		5mm
Max. grain size		5mm
Max. water temperature		35° C
Water type		clean

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWXG9513



Voltage / frequency		230V~ 50Hz
Power		550W
Flow rate		10.500 l/h
Max. pressure height		7m
Max. submersible depth		7m
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Polypropylene pump housing



POWXG9524



Voltage / frequency		230V~ 50Hz
Power		750W
Flow rate		12.500 l/h
Max. pressure height		8m
Max. submersible depth		7m
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Stainless steel tank

SUBMERSIBLE PUMPS

DOMPELPPOMPEN | POMPES SUBMERSIBLES | TAUCHPUMPEN | BOMBAS SUMERGIBLES



POWXG9535



Voltage / frequency		230V~ 50Hz
Power		900W
Flow rate		14.000 l/h
Max. pressure height		9m
Max. submersible depth		7m
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Stainless steel tank




POWXG9537



Voltage / frequency		230V~ 50Hz
Power		1100W
Flow rate		15.000 l/h
Max. pressure height		10m
Max. submersible depth		7m
Max. grain size		35mm
Max. water temperature		35° C
Water type		dirty

- | 10m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Floating switch
- | Stainless steel tank

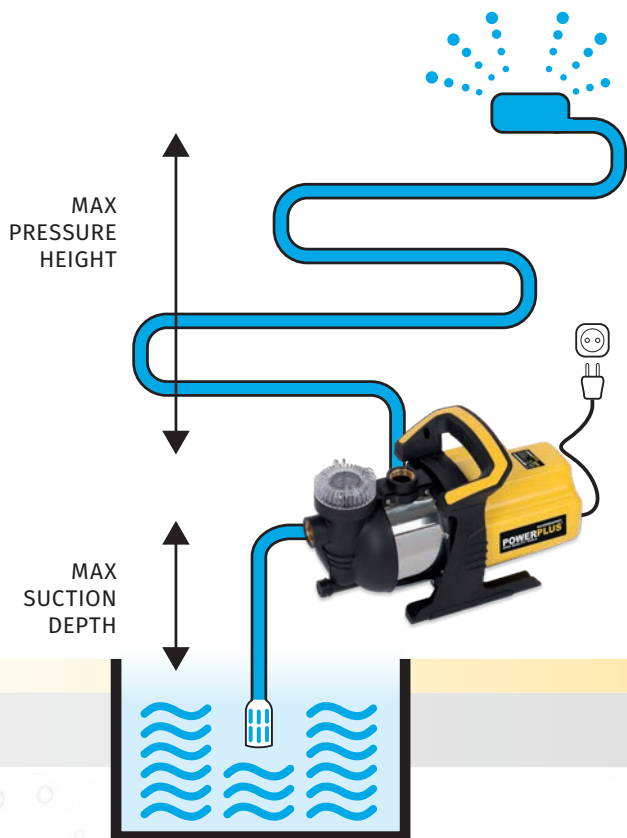

BUILT-IN-FILTER



POWXG9554




Voltage / frequency		230V~ 50Hz
Power		1000W
Flow rate		3500 l/h
Max. pressure height		44m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | ABS motor housing
- | Built-in filter
- | Stainless steel covered nylon pump head

PRESSURE PUMPS - HOME & GARDEN

HYDROFOORGROEPEN | GROUPES HYDROPHORES | DRUCKPUMPEN | BOMBAS DE PRESIÓN

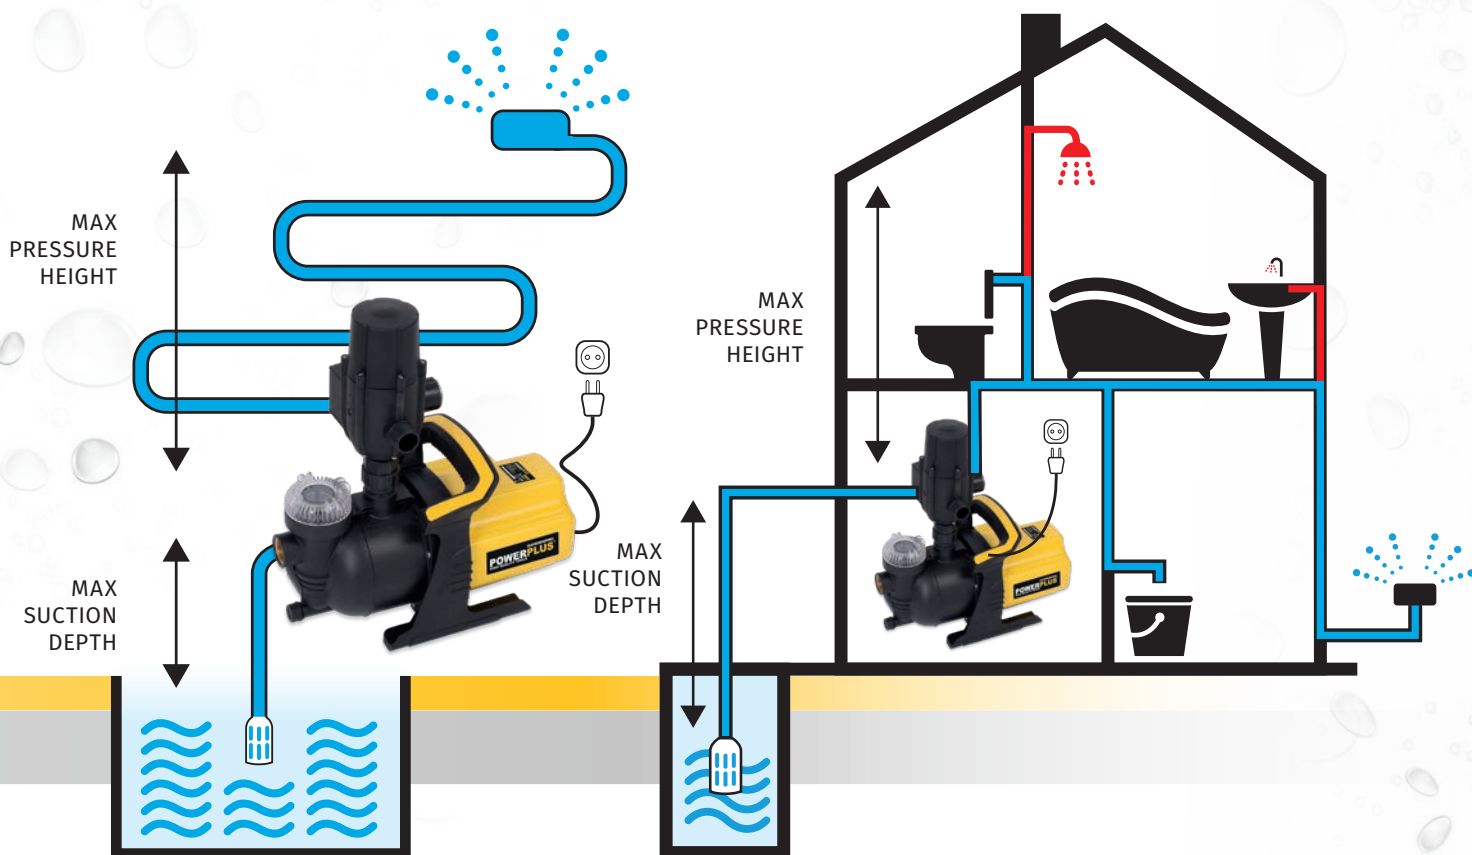

POWXG9561



Voltage / frequency		230V~ 50Hz
Power		600W
Flow rate		3000 l/h
Max. pressure height		35m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | ABS motor housing
- | Built-in filter
- | Automatic pump control



POWXG9565




Voltage / frequency		230V~ 50Hz
Power		1200W
Flow rate		3800 l/h
Max. pressure height		48m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | ABS motor housing
- | Built-in filter
- | Automatic pump control
- | Stainless steel covered nylon pump head

PRESSURE PUMPS - HOME

HYDROFOORGROEPEN | GROUPES HYDROPHORES | DRUCKPUMPEN | BOMBAS DE PRESIÓN

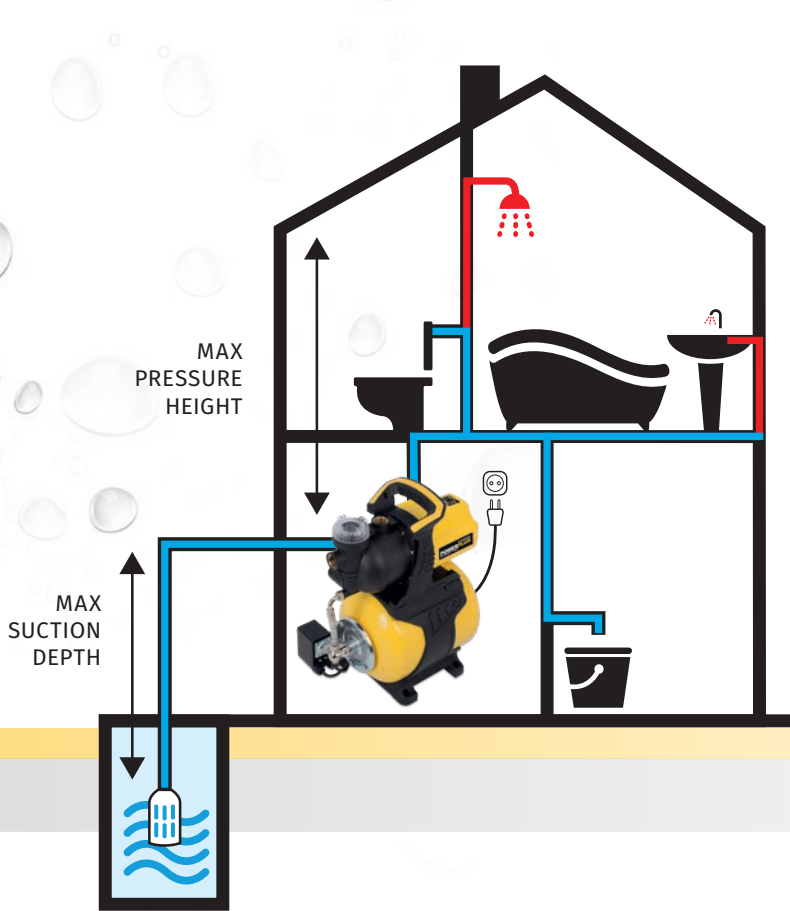

POWXG9571



Voltage / frequency		230V~ 50Hz
Power		600W
Flow rate		3000 l/h
Tank capacity		19L
Max. pressure height		35m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Abs motor housing
- | Built-in filter
- | Pressure switch
- | Metal tank
- | Nylon pump head



POWXG9573



Voltage / frequency		230V~ 50Hz
Power		1000W
Flow rate		3500 l/h
Tank capacity		19L
Max. pressure height		44m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Abs motor housing
- | Built-in filter
- | Pressure switch
- | Metal tank
- | Stainless steel covered nylon pump head



POWXG9576



Voltage / frequency		230V~ 50Hz
Power		1200W
Flow rate		3800 l/h
Tank capacity		19L
Max. pressure height		48m
Max. suction depth		7m
Max. water temperature		35° C
Water type		clean

- | 1.2m electric cable (RN-F) with earthed plug
- | Carrying handle
- | Abs motor housing
- | Built-in filter
- | Pressure switch
- | Stainless steel tank
- | Stainless steel covered nylon pump head

HIGH PRESSURE CLEANERS

HOGEDRUKREINIGERS | NETTOYEURS HAUTE PRESSION | HOCHDRUCKREINIGER | HIDROLIMPIADORAS





POWXG90400

Voltage / frequency		220-240V~ 50Hz
Power		1200W
Rated pressure		70bar
Max. pressure		100bar
Flow rate		390 l/h
Detergent suction		no
High pressure hose length		3m
Cable length		3m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		5kg

| Adjustable nozzle

**START/STOP
SYSTEM**



POWXG90405

Voltage / frequency		220-240V~ 50Hz
Power		1400W
Rated pressure		80bar
Max. pressure		110bar
Flow rate		390 l/h
Detergent suction		no
High pressure hose length		5m
Cable length		5m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		5.8kg

| Soap bottle
 | Adjustable nozzle + turbo nozzle

**START/STOP
SYSTEM**

HIGH PRESSURE CLEANERS

HOGEDRUKREINIGERS | NETTOYEURS HAUTE PRESSION | HOCHDRUCKREINIGER | HIDROLIMPIADORAS



5 400338 076688 >

POWXG90410

Voltage / frequency		220-240V~ 50Hz
Power		1800W
Rated pressure		100bar
Max. pressure		140bar
Flow rate		420 l/h
Detergent suction		yes
High pressure hose length		8m + hose reel
Cable length		5m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		7.7kg

- | 330mm lance extension
- | 750ml built-in detergent tank
- | Adjustable nozzle + turbo nozzle
- | Patio cleaner

**START/STOP
SYSTEM**



5 400338 076695 >

POWXG90415

Voltage / frequency		220-240V~ 50Hz
Power		2000W
Rated pressure		110bar
Max. pressure		160bar
Flow rate		450 l/h
Detergent suction		yes
High pressure hose length		8m + hose reel
Cable length		5m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		11.6kg

- | Extendable handle
- | 330mm lance extension
- | 1000ml built-in detergent tank
- | Adjustable nozzle + turbo nozzle
- | Patio cleaner

**START/STOP
SYSTEM**



POWXG90420

Voltage / frequency		220-240V~ 50Hz
Power		2200W
Rated pressure		120bar
Max. pressure		170bar
Flow rate		450 l/h
Detergent suction		yes
High pressure hose length		8m + hose reel
Cable length		5m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		11.4kg

- | Metal spray gun
- | 330mm lance extension
- | 1100ml built-in detergent tank
- | Adjustable nozzle + turbo nozzle + patio cleaner
- | 10m pipe cleaning set

START/STOP SYSTEM



POWXG90425

Voltage / frequency		220-240V~ 50Hz
Power		2500W
Motor		Induction
Rated pressure		130bar
Max. pressure		195bar
Flow rate		468 l/h
Detergent suction		yes
High pressure hose length		8m + hose reel
Cable length		5m
Pump housing		Aluminium
Max. water temperature		50°C
Weight		21kg

- | Metal spray gun
- | 330mm lance extension
- | 1100ml built-in detergent tank
- | Adjustable nozzle + turbo nozzle + patio cleaner
- | 10m pipe cleaning set

START/STOP SYSTEM

INDUCTION MOTOR

HIGH PRESSURE CLEANERS

HOGEDRUKREINIGERS | NETTOYEURS HAUTE PRESSION | HOCHDRUCKREINIGER | HIDROLIMPIADORAS



**OIL
NOT
INCLUDED**



also available in 5L POWOIL035



- OHV ENGINE
- HIGH TURBO POWER OUTPUT
- EXCELLENT PERFORMANCE
- STRONGER TORQUE
- LOW VIBRATION
- EASY START
- REDUCED EMISSION



SELF PRIMING TUBE




POWXG9009



Cylinder capacity		208cc
Engine		4-stroke eco driver power 4.1kW
Rated pressure		150bar
Max. pressure		173bar
Flow rate		540 l/h
Detergent suction		yes
High pressure hose length		8m
Max. water temperature		50°C
Pump house material		Aluminium
Weight		27kg

- | Metal spray gun
- | 2m self priming tube
- | 3600ml fuel tank
- | 2000ml detergent tank
- | Adjustable spray pattern (5 nozzles)
 - 0° pencil spray (persistent dirt)
 - 15° spray pattern (paint removal)
 - 25° intens cleaning of large areas
 - 40° cleaning car, boat, ...
 - Low pressure (detergent application)





POWERPLUS[®]
HIGH QUALITY TOOLS

EVEREADY

HIGH PRESSURE CLEANER ACCESSORIES

ACCESSOIRES HOGEDRUKREINIGERS | ACCESSOIRES NETTOYEURS HAUTE PRESSION | ZUBEHÖR HOCHDRUKREINIGER | ACCESORIOS LIMPIADORAS ALTA PRESIÓN

POWXG90950
PIPE CLEANING SET 10m



COMPATIBLE WITH HIGH PRESSURE CLEANERS

POWXG90400 | **POWXG90405** | **POWXG90410** |
POWXG90415 | **POWXG90420** | **POWXG90425**



POWXG90091
PIPE CLEANING SET 15m



COMPATIBLE WITH HIGH PRESSURE CLEANERS

POWXG9008 | **POWXG9009**



WATER PUMP ACCESSORIES

ACCESSOIRES WATERPOMPEN | ACCESSOIRES POMPES À EAU | ZUBEHÖR WASSERPUMPEN | ACCESORIOS BOMBAS DE AGUA

POWACW01
OUTLET SUBMERSIBLE PUMP - FEMALE



POWACW02
OUTLET GARDEN PUMP - MALE



POWACW03
ASPIRATION HOSE - 8m 1"



POWACW04
FILTER - 1L





5 400338 079023 >

varo

VIC. VAN ROMPUY nv

JOSEPH VAN INSTRAAAT 9
2500 LIER - BELGIUM
TEL +32 (0)3 292.92.92
FAX +32 (0)3 292.92.72
E-MAIL: INFO@VARO.COM
WWW.VARO.COM

OFFICES:

IBERICA BRICOLAGE S.L. - ESPAÑA
ASIA PACIFIC HONG KONG Ltd / SHANGHAI PRC
AUSTRALIA Pty Ltd / GERMANY GmbH

